

低壓油壓缸FA TYPE

Low Pressure Hydraulic Cylinder

謙泰空油壓


低壓油壓缸FA TYPE

Low Pressure Hydraulic Cylinder


CHIAN TAY HYDRAULICS

- 使用壓力70 kg/cm² (7MPa)
Use of pressure: 70 kg/cm²
- 方形鑄件油壓缸
Square-typed die casting hydraulic cylinder
- 此油壓缸也可以做感應式Ø40-Ø125
Sensors are available from Ø40 to Ø125
- 鑄件油壓缸抗壓性較弱建議以140kg/cm² (14MPa)較佳


表示方法：




1	固定方式
2	油壓缸內徑(mm)
3	油壓缸行程(mm)
4	活塞桿型式：N內牙、W外牙、T車溝槽、T2銑溝槽
5	感應線2條，不用感應式S2不表示

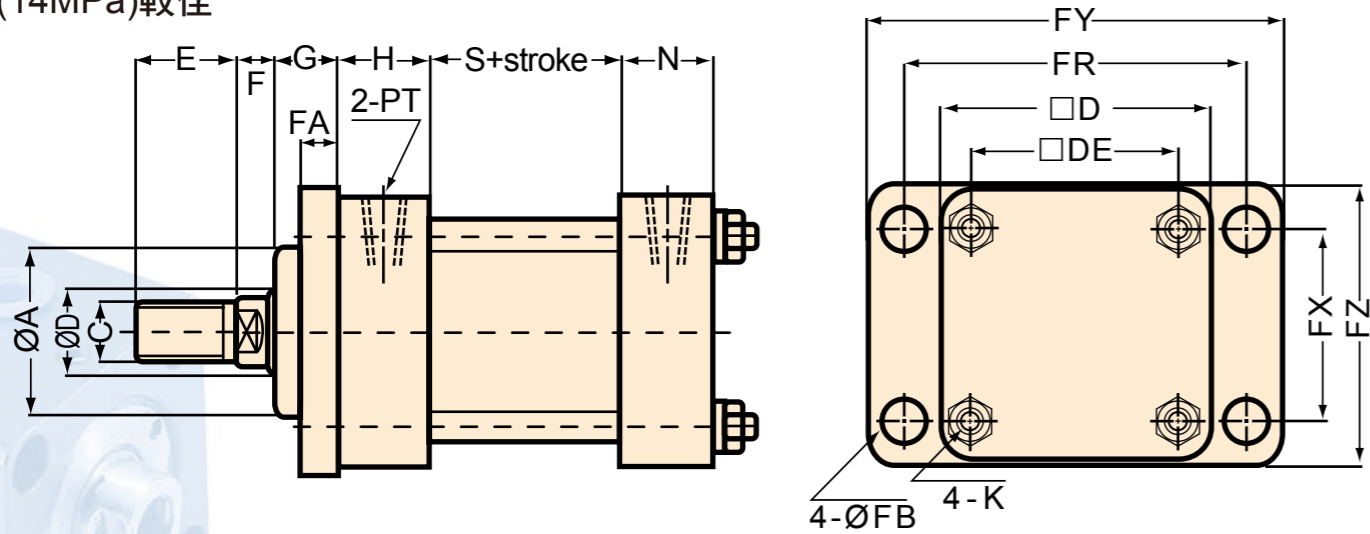

SIZE BORE	Ø A	Ø D	C	□ D	□ DE	E	F	G	H	N	FA	FB	FR	FX	FY	FZ	K	S	PT
Ø30	30	16	M14XP1.5	50	34	28	13	15	25	25	11	9	80	34	105	52	M8XP1.25	50	1/4
Ø40	40	20	M16XP1.5	64	45	28	17	20	30	30	11	12	93	50	115	72	M8XP1.25	50	3/8
Ø50	45	20	M16XP1.5	70	50	28	17	20	30	28	11	12	93	50	115	72	M10XP1.25	50	3/8
Ø63	55	25	M22XP1.5	85	60	40	20	30	31	31	14	14	117	60	140	90	M10XP1.25	50	3/8
Ø80	62	30	M26XP1.5	106	74	40	20	32	37	35	20	14	152	75	180	105	M12XP1.5	55	1/2
Ø100	78	35	M30XP1.5	122	89	45	20	32	37	37	20	16	158	90	200	125	M14XP1.5	80	1/2
Ø125	85	50	M40XP2.0	147	110	55	25	31	40	40	20	18	184	110	225	153	M16XP1.5	80	1/2

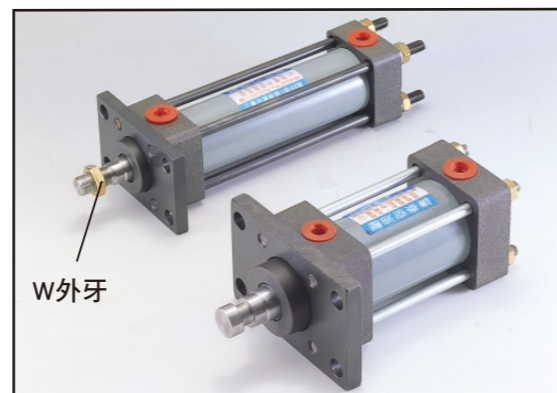

訂購圖

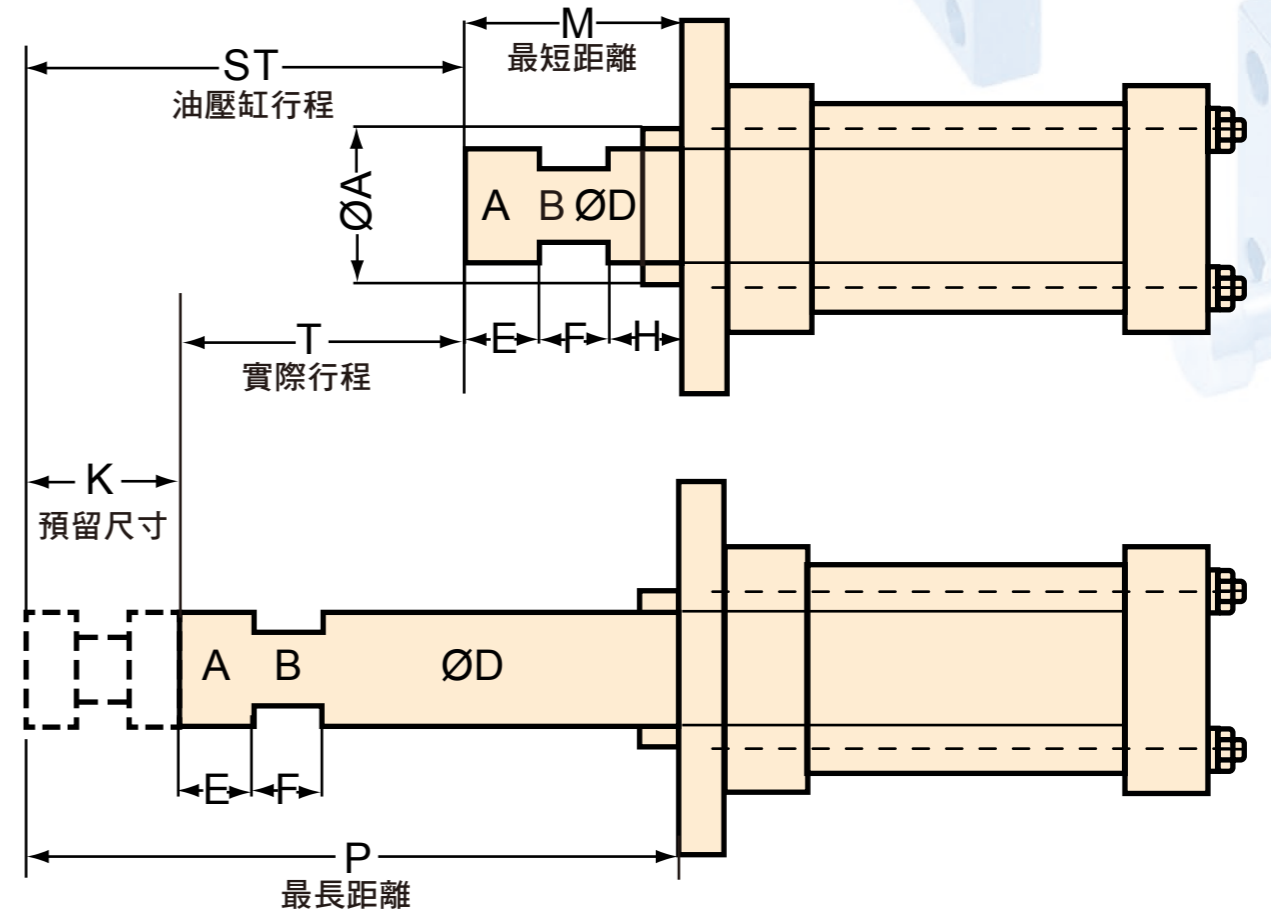


M：最短距離
P：最長距離
T：實際行程 Actual stroke
K：預留尺寸 Reserved size
ST：油壓缸行程(T加K)
Hydraulic cylinder stroke(T plus K)

A	B	ØD	E	F	H	M	P	T	K	ST	FR	FX	FB

以上空格需填寫圖中應對尺寸

- 建議油壓缸行程50mm以內K值為5-10mm
- 建議油壓缸行程100mm以內K值為10-15mm
- 建議油壓缸行程100mm以上K值為15-20mm

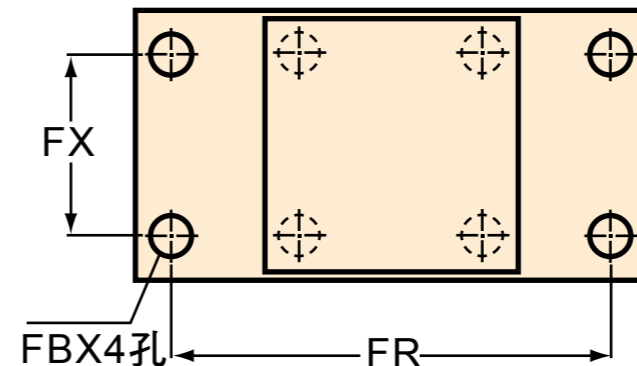

謙泰空油壓有限公司

- 地址：台北縣三重市重新路一段42號(台北橋邊)
- TEL: 02-29733752, 29725258, 29735107~8
- FAX: 02-29735109
- E-mail: chian.tay@msa.hinet.net